


Features

- 3G/HD/SD triple-rate distribution
- Four separately buffered and relocked outputs
- Cable equalization (Belden 1694A) and signal retiming
- Dual color LED indication of input lock and rate
- Passes all ancillary data
- Provide automatic input cable equalization up to 1000ft@SD, 500ft@HD and 190ft@3G
- Support protocols: SMPTE 259M, 292M, 424M and 425M
- Support Data rates 270/1483/1485/2970Mbps

Package contents

1. 1x4 3G-SDI Distribution Amplifier
2. Power adapter 5V/2A
3. Quick start guide


Layout



BNC connector: 75Ω inter-locked socket

1	SDI output	3G/HD/SD-SDI Output
2	SDI output	3G/HD/SD-SDI Output
3	Power input	Connect with power adapter 5V/2A
4	Power LED	Turn on when power is on
5	SDI input	3G/HD/SD-SDI input
6	3G signal LED	On when using 3G signal
7	HD signal LED	On when using HD signal
8	SD signal LED	On when using SD signal
9	SDI output	3G/HD/SD-SDI Output
10	SDI output	3G/HD/SD-SDI Output

Application

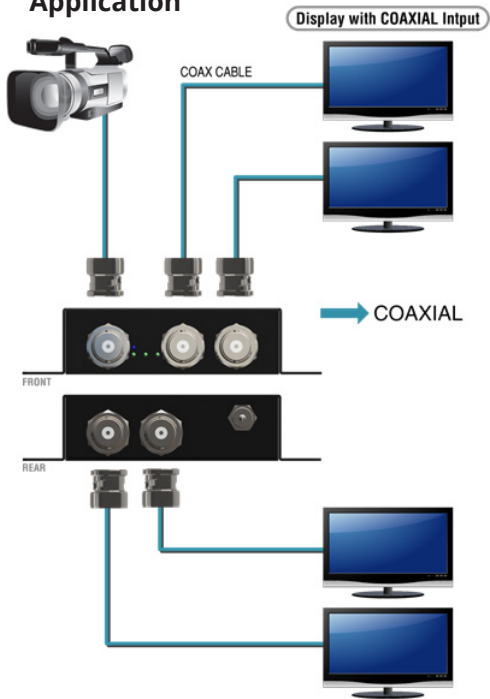

ACEPRO_{AV}

1x4 3G-SDI Distribution Amplifier

Quick Start Guide

