



5x1 HDMI Switch 4K

User Reference Guide



Introduction

5x1 HDMI Switch 4K allows any of the 5 HDMI sources to be displayed on one HDMI display and supports ultra-high resolution up to 4K.

Key Features and Benefits

- Connects up to 5 HDMI sources to one HDMI display for seamless transitions
- Delivers astonishing picture quality by supporting high resolutions up to 4Kx2K @30Hz
- Built-in switch button, the included remote control allows you to remotely control your HDMI sources
- Supports 3D, HDMI 1.4 and HDCP 1.4. Backwards compatible with previous versions
- Premium metal enclosure enhances durability and reliability

Specifications

Compliance	HDMI 1.4 / HDCP 1.4
Resolution	480p / 720p / 1080i / 1080p / 4K (3840x2160 @60Hz, YUV 4:2:0)
Audio	Dolby TrueHD, DTS-HD master audio
Video bandwidth	Up to 10.2Gbps
Connectors	Input: 5 x 19-pin, HDMI Type-A, Female Output: 1x 19-pin, HDMI Type-A, Female
HDMI cable range	Input up to 5m Output up to 10m
Housing material	Metal
Power adapter	Input: AC 100-240V / 50~60Hz Output: DC 5V / 1A
Dimensions	4.53" (W) x 0.99" (H) x 2.45" (D)
Weight	0.69lbs
Operating temperature	32 to 104 degrees F
Storage temperature	-4 to 158 degrees F
Relative humidity	20% to 90% RH (non-condensing)

Package Contents

- *5x1 HDMI Switch 4K*
- Power Adapter
- IR remote control
- User reference guide

Layout



Figure 1: Front side

- **Power LED:** On when the unit is powered
- **Source Selection:** Press to select the input source (Input 1, 2, 3, 4 or 5)
- **IR Receiver:** Receive IR signal from the remote control
- **Input LEDs:** On when input signals are detected
- **Output LED:** On when the output signal is detected
- **HDMI Output:** Connect to your HDMI display with an HDMI cable (cable not included)



Figure 2: Rear side

- **HDMI Inputs (x5):** Connects to HDMI source devices by HDMI cables (cable not included)
- **Power plug:** Power adapter plug

IR Remote Control

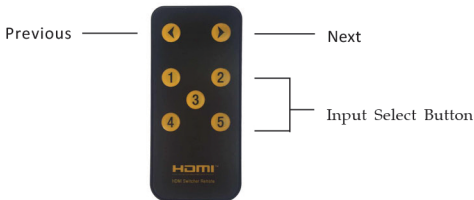


Figure 3: IR Remote Control

- **Previous:** Select the previous input source
- **Next:** Select the next input source
- **Input Select Button (1-5):** Select input source 1, 2, 3, 4 or 5

Hardware Installation

1. Power off all source devices and displays.
2. Connect up to 5 HDMI source devices to the switch's HDMI input ports using HDMI cables (cables not included).
3. Connect your HDMI display to the switch's HDMI Output with an HDMI cable (cable not included).
4. Connect the included power adapter to the switch's Power plug and plug it into a reliable power outlet.
5. Power on all of the connected devices.
6. The switch is now ready for use.